




# UGY100PS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 80 kW (100 kVA)  
 Standby Rating — 88 kW (110 kVA)  
 3-Phase, 50 Hertz, 0.8 PF

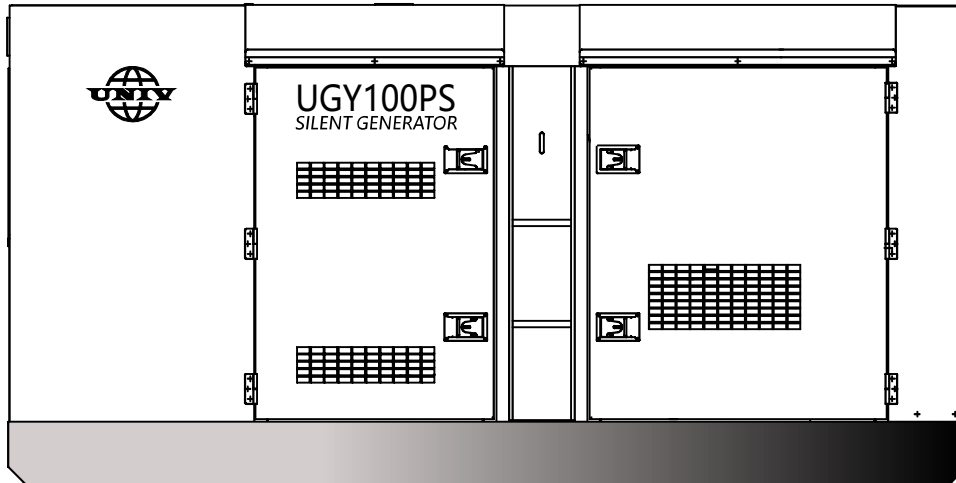

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 69dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaningcycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature,engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

### UNIVPOWER SILENT SERIES


#### UNIV POWER DECIBELLEVELS

Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph  
 → UNIVGenset at 7m
- 60 — Air conditioner at 6m
- 50 — Normal conversation

**69.0**  
DECIBELS

### GENERATOR OUTPUT PANEL

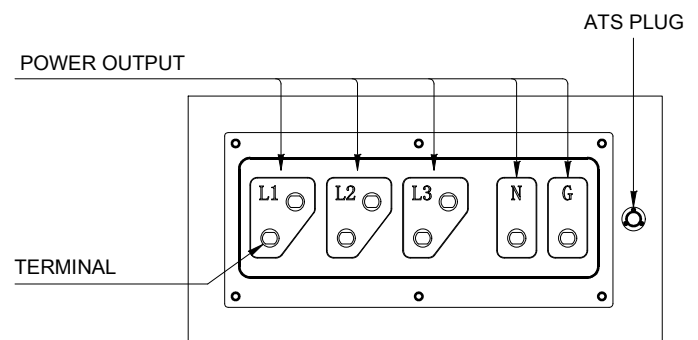



# UGY100PS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

| Generator Specifications                   |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| Model                                      | Revolving field, self-ventilated weatherproof                      |
| Armature Connection                        | Star with Neutral                                                  |
| Phase                                      | 3                                                                  |
| Standby Output                             | 88 KW (110 KVA)                                                    |
| Prime Output                               | 80 KW (100 KVA)                                                    |
| Power Factor                               | 0.8                                                                |
| Voltage Regulation (No load to full load)  | ±0.5%                                                              |
| Generator RPM                              | 1500                                                               |
| Frequency                                  | 50 Hz                                                              |
| No. of Poles                               | 4                                                                  |
| Excitation                                 | Brushless with AVR                                                 |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load    |
| Frequency Regulation: Steady State         | ±0.25% of mean value for constant loads from no load to full load. |
| Insulation                                 | Class H                                                            |
| Sound Level dB(A) Full load at 7M          | 69                                                                 |

| Amperage                                    |              |
|---------------------------------------------|--------------|
| Rated Voltage                               | Maximum Amps |
| 3Ø Volt 230/400                             | 144.3 Amps   |
| 3Ø Volt 220/380                             | 151.9 Amps   |
| Main Line Circuit Breaker Rating            | 160 Amps     |
| Over Current Relay Trip Set Point 400V Mode | 176 Amps     |

| Fuel System        |                           |
|--------------------|---------------------------|
| Fuel Tank Capacity | 76.6 gallons (290 liters) |
| Fuel Consumption   | L / h                     |
| At full load       | 20.3                      |
| At 3/4 load        | 15.3                      |
| At 1/2 load        | 10.6                      |
| At 1/4 load        | 8.0                       |

| Control system     |                               |
|--------------------|-------------------------------|
| Controller Brand   | Deepsea                       |
| Model              | DSE3110                       |
| Module             | Manual/Auto start/stop module |
| Standard function  | Engine control                |
|                    | Generator monitoring          |
|                    | Generator protection          |
|                    | Specification                 |
| Display            | Frequency                     |
|                    | Battery voltage               |
|                    | Running hour                  |
| Warning/shutdown   | under/over voltage            |
|                    | under/over speed              |
|                    | under/over frequency          |
|                    | Low oil pressure              |
|                    | High water temperature        |
| Communication port | USB                           |

| Engine Specifications     |                                                                    |
|---------------------------|--------------------------------------------------------------------|
| Make / Model              | Perkins / 1104C-44TAG2                                             |
| Emissions                 | /                                                                  |
| Starting System           | Electric                                                           |
| Design                    | 4-cycle, water cooled, direct injection, natural intake air cooled |
| Displacement              | 4.4 liters                                                         |
| No. cylinders             | 4                                                                  |
| Bore x Stroke             | 105 x 127 mm                                                       |
| Gross Engine Power Output | 125.4 hp (93.6 kW)                                                 |
| Compression Ratio         | 18.23 : 1                                                          |
| Engine Speed              | 1500 rpm                                                           |
| Overspeed Limit           | 1725 rpm                                                           |
| Oil Capacity              | 2.11 US gallons (8.0 liters)                                       |
| Coolant Capacity          | 3.32 US gallons (12.6 liters)                                      |
| Battery                   | 24V 80Ah x 2                                                       |

| Alternator                      |                                |
|---------------------------------|--------------------------------|
| Alternator Brand                | Stamford / Meccalte / Dingol   |
| Alternator Model                | UCI274C/ ECP32 2S4C/ DG274C    |
| Excitation                      | Brushless, Self-Excited system |
| Capacity(KVA)                   | 100kva                         |
| Power(KW)                       | 80kw                           |
| Efficiency(%)                   | 88%                            |
| Insulation class                | Class H                        |
| Protection class                | Ip23                           |
| Steady state voltage regulation | ±1%                            |
| Voltage control                 | AVR                            |

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY100PS

## UNIVPOWER SILENT SERIES

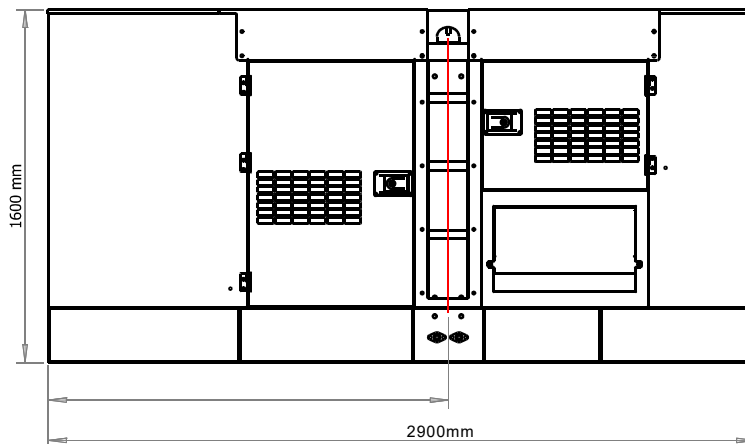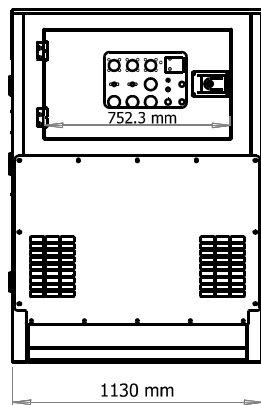

| Weight                      |          |
|-----------------------------|----------|
| Dry Weight                  | 1,730 kg |
| Wet Weight                  | 1,740 kg |
| Max. Lifting Point capacity | 3,460 kg |

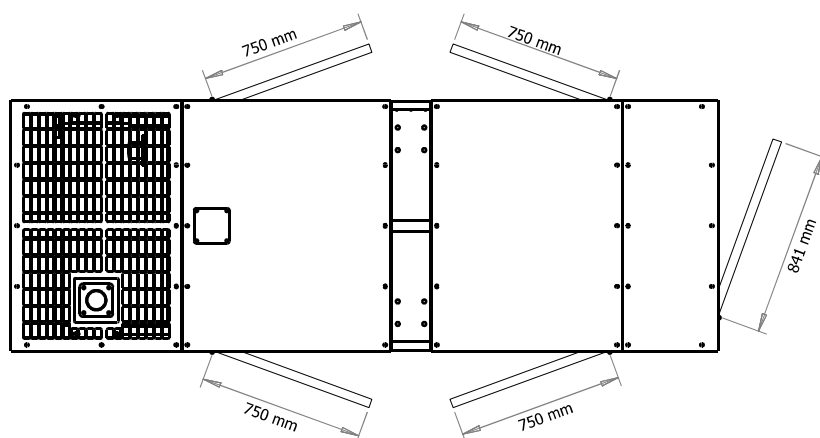

Manufactured by  
**Zhejiang Universal Machinery Co., Ltd**  
Add: No 18-9 Nanshan Road, Qujiang Zone,  
Quzhou city, Zhejiang Province, CN  
Tel: 0086-570-3377022  
Fax: 0086-570-3377023  
Website: [www.univpower.com](http://www.univpower.com)